

AC7069A Datasheet

Zhuhai Jieli Technology Co.,LTD

Version 2.0

Date 2025.01.16

Copyright © Zhuhai Jieli Technology Co.,LTD. All rights reserved.

Revision History

Date	Revision	Description
2024.07.16	V1.0	Initial Release
2024.07.30	V1.1	Update Pin Description And Content
2024.09.27	V1.2	Update Pin Description(Update FMIP IO Type)
2025.01.16	V2.0	Update Features_Bluetooth Update Block Diagram

Table of Contents

Revision History	1
Table of Contents	2
AC7069A Features	3
1 Block Diagram	4
2 Pin Definition	5
2.1 Pin Assignment	5
2.2 Pin Description	6
3 Electrical Characteristics	8
3.1 Absolute Maximum Ratings	8
3.2 ESD Ratings	8
3.3 PMU Characteristics	8
3.4 Battery Charge	9
3.5 IO Characteristics	9
3.6 Audio DAC Characteristics	10
3.7 Audio ADC Characteristics	12
3.8 BT Characteristics	13
3.9 FM Characteristics	14
4 Package Information	15
4.1 SOP16	15
5 IC Marking Information	16
6 Solder-Reflow Condition	17

AC7069A Features

SYSTEM

- 32-bit Single-core DSP 192MHz
- With IEEE754 Single precision FPU
- Support FFT/MATRIX/MATH
- 1 x I-cache
- Support EMU
- On-chip SRAM 152kbyte
- Support MMU
- Support MPU
- Built-In Flash
- 24MHz crystal oscillator
- Internal RC oscillator, PLL

DSP Audio Processing

- SBC/AAC codec
- mSBC voice codec supported for BT phone
- PLC for voice processing
- Single MIC ENC
- Multi-band DRC
- Multi-band EQ
- Support spatial sound

Audio

- 2 x 16bit DAC
 - ❖ SNR 108dB
 - ❖ Noise 6uVrms
 - ❖ Supports differential mode
 - ❖ Sampling rate 8~96kHz
- 1 x 16bit ADC
 - ❖ SNR 98dB
 - ❖ Sampling rate 8~48kHz
 - ❖ Support AMUX
- I²S AUDIO Master/Slave interface

Bluetooth

- Dual-mode BT6.0 with LE Audio (DN Q332415)
- Support LE audio BIS/CIS
- Support long range BLE
- Maximum transmitting power 10dBm
- Receiver sensitivity

- ❖ -89dBm @BR
- ❖ -89dBm @EDR 1/4 DQPSK
- ❖ -81dBm @EDR 8DPSK

FM

- Support Mono/Stereo
- Receiver sensitivity 20 dBuV

Peripherals

- 1 x Full speed USB
- 1 x SD host controller
- 4 x Multi-function 16bit timer
- 2 x UART interface
- 1 x I²C Master/Slave interface
- 2 x SPI Master/Slave interface
- 1 x QDEC
- 4 x MCPWM
- 1 x 10bit ADC(6 Channel)
- 8 x GPIO Support function remapping

PMU

- Integrated battery charger up to 300mA
- Support temperature sensor
- VPWR range 4.5V to 5.5V
- VBAT range 2.7V to 4.5V
- IOVDD range 2.7V to 3.6V

Packages

- SOP16

Temperature

- Operating temperature
 - TC = -20℃ to +85℃ (standard range)
 - TC = -40℃ to +105℃ (extended range)
- Storage temperature -65℃ to +150℃

Applications

- Bluetooth live sound card
- Bluetooth soundbar

1 Block Diagram

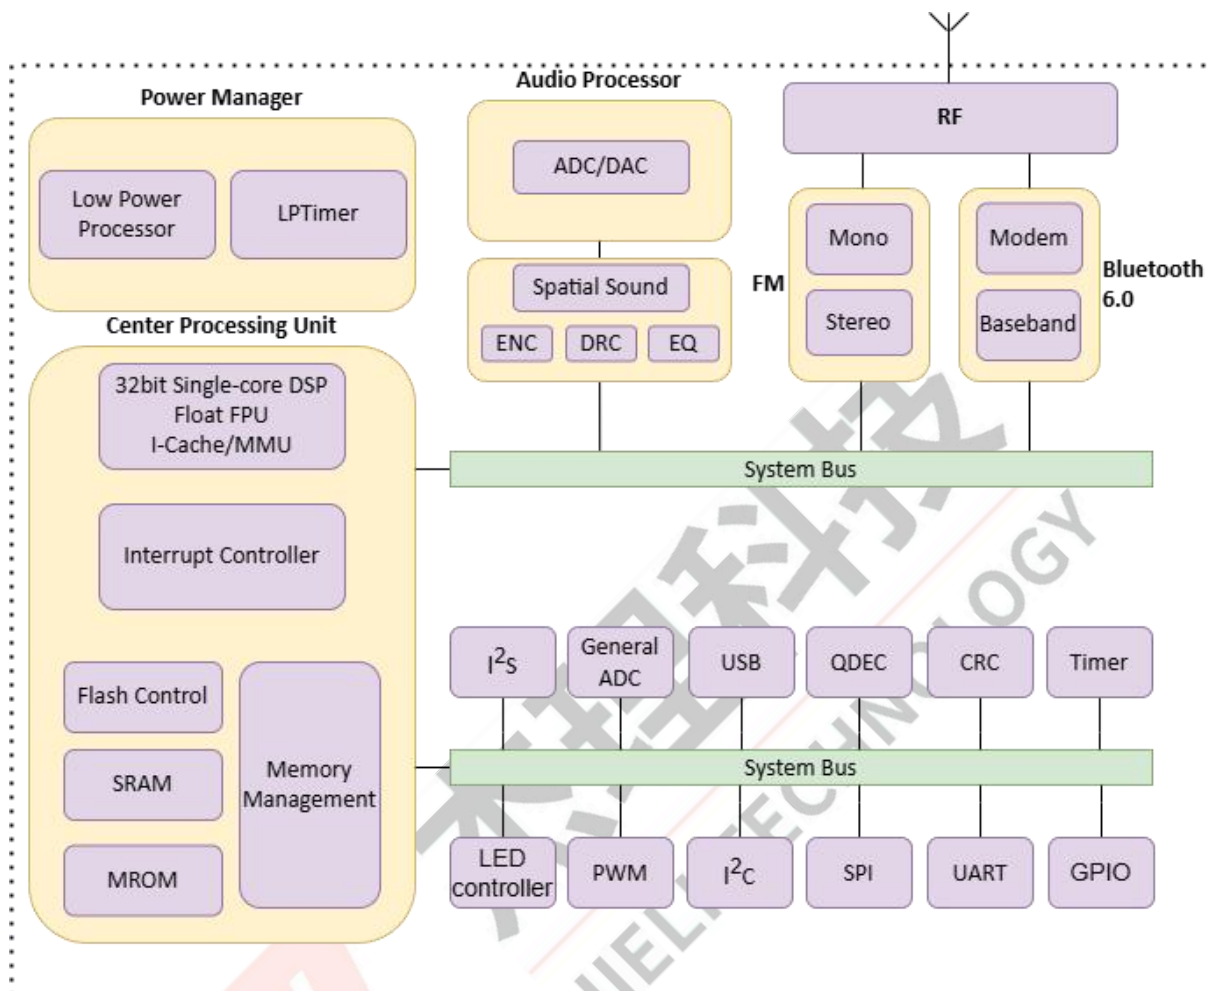


Figure 1-1 AC7069A Block Diagram

2.1 Pin Assignment

Figure 2-1 AC7069A Pin Assignment

2.2 Pin Description

Table 2-2-1 AC7069A Pin Description

Pin No.	Name	Type	IO Initial State	Description
1	IOVDD	P	--	IO Power
2	PB1	I/O	200kΩ Pull-up	Hold down 0 to reset UART0 RX(B) TIMER2 CLK
3	PB3	I/O	Z	AUX3(Audio ADC Input) TIMER2 PWM
	FMIP	RF	--	FM Postive Input
4	BTRF	RF	--	Bluetooth RF Antenna
5	XOSCI	I	--	Crystal Oscillator Input
6	XOSCO	O	--	Crystal Oscillator Output
7	PC3	I/O	Z	ADC10(ADC Input Channel 10) SPI1 Data1(B) SPI1 Data1(D) UART0 TX(D) UART0 RX(D) TIMER2 Capture
	USBDM	I/O	15kΩ Pull-down	ADC14(ADC Input Channel 14) USB Negative Data SPI1 DATA0(D) I ² C SDA(A)
8	PC2	I/O	Z	ADC15(ADC Input Channel 15) SPI1 DATA2(B) SPI1 DATA2(C) SPI1 DATA2(D) I ² S MCLK(B)
	USBDP	I/O	15kΩ Pull-down	ADC13(ADC Input Channel 13) USB Positive Data SPI1 CLK(D) I ² C SCL(A)
9	PA4	I/O	Z	ADC3(ADC Input Channel 3) AUX2(Audio ADC Input) SPI1 DATA1(A) I ² S LRCK(A) I ² S Data3(B)

Pin No.	Name	Type	IO Initial State	Description
10	PA3	I/O	Z	ADC2(ADC Input Channel 2) AUX1(Audio ADC Input) SPI1 DATA0(A) I ² S SCLK(A) I ² S Data2(B)
11	PA1	I/O	Z	ADC1(ADC Input Channel 1) MIC(Audio ADC Input) I ² S Data1(A)
	PA0	I/O	Z	ADC0(ADC Input Channel 0) MICBIAS(MIC Bias Output) I ² S Data0(A) I ² S Data0(B) Clockout0
12	VSS	G	--	Ground
13	DACL	O	--	Left Channel DAC Output
14	DACR	O	--	Right Channel DAC Output
	PB7	I/O	Z	ADC9(ADC Input Channel 9) SPI0 DATA0(B) SPI1 DATA0(C) I ² C SDA(C) Q-decoder DATA1
15	VPWR	I/O	Z	Charge Power Input UART0 TX(C) UART0 RX(C) TIMER3 PWM TIMER1 Capture
16	VBAT	P	--	Battery Input

Note

- 1.IO initial state abbreviations Z--High resistance, H--High level, L--Low level, X--May be changed during power on.
- 2.Timer, UART0 and QDEC functions also can be remapped to any I/O.
- 3.MCPWM, UART1, SD functions can be remapped to any I/O.

Table 2-2-2 Pin Types Description

Pin Type	Description	Pin Type	Description
P	Power	I/O	Input or Output
G	Ground	I	Input
RF	RF antenna	O	Output

3 Electrical Characteristics

3.1 Absolute Maximum Ratings

Table 3-1 Absolute Maximum Ratings

Symbol	Parameter	Min	Max	Unit
Topt	Operating temperature	-20	+85	°C
Tstg	Storage temperature	-65	+150	°C
VBAT	Supply Voltage	-0.3	4.5	V
VPWR		-0.3	6.0	V
IOVDD		-0.3	3.6	V
GPIO	Input voltage of GPIO	-0.3	3.6	V

Note

1. Stresses beyond those listed under absolute maximum ratings may cause permanent damage to the device.

3.2 ESD Ratings

Table 3-2 ESD Ratings

Parameter	Typ	Test pin	Reference standard
Human Body Mode	±4kV	All pins	JEDEC EIA/JESD22-A114
Machine Mode	±400V	All pins	JEDEC EIA/JESD22-A115
Charge Device Model	±2kV	All pins	JEDEC EIA/JESD22-C101F

3.3 PMU Characteristics

Table 3-3 PMU Characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
VPWR	Power supply	--	4.5	5.0	5.5	V
VBAT	Power supply	--	2.7	3.7	4.5	V
Operating mode						
Symbol	Parameter	Conditions	Min	Typ	Max	Unit
IOVDD	Voltage output	--	--	3.0	--	V
	Loading current	IOVDD=3.0V@VBAT = 3.7V	--	--	250	mA
Low Power mode						
Symbol	Parameter	Conditions	Min	Typ	Max	Unit
IOVDD	Loading current	IOVDD=3.0V@VBAT = 3.7V	--	--	10	mA

3.4 Battery Charge

Table 3-4 Charger Characteristics

Symbol	Parameter	Min	Typ	Max	Unit
VPWR	Charge Input Voltage	VBAT+0.1V	5.0	5.5	V
CV	CV Mode Voltage Accuracy	4.175	4.2	4.225	V
		4.325	4.35	4.375	V
CC	CC Mode Current	20	--	300	mA
I _{end}	End Of Charge Current	2	--	30	mA
V _{Trikl}	Trickle Charge Voltage	--	3.0	--	V

3.5 IO Characteristics

Table 3-5 IO Characteristics

Input Characteristics						
Symbol	Parameter	Conditions	IO	Min	Max	Unit
V _{IL}	Low-Level Input Voltage	IOVDD = 3.0V	PA0,PA1,PA3,PA4 PB1,PB3,PB7 PC2,PC3 USBDP USBDM VPWR	-0.3	1.4	V
V _{IH}	High-Level Input Voltage	IOVDD = 3.0V	PA0,PA1,PA3,PA4 PB1,PB3,PB7 PC2,PC3 USBDP USBDM	1.7	3.3	V
		IOVDD = 3.0V	VPWR	1.7	5.5	V
Output Characteristics						
Symbol	Parameter	Conditions	IO	Typ		Unit
I _{OL}	Output Current	IOVDD = 3.0V Voutput = 0.3V	PA0,PA1,PA3,PA4 PB1,PB3,PB7 PC2,PC3	2(HD=0) 6(HD=1) 20(HD=2) 24(HD=3)		mA
		IOVDD = 3.0V Voutput = 0.3V	VPWR	2		mA
		IOVDD = 3.0V Voutput = 0.3V	USBDP USBDM	8		mA
I _{OH}	Output Current	IOVDD = 3.0V Voutput = 2.7V	PA0,PA1,PA3,PA4 PB1,PB3,PB7 PC2,PC3	2(HD=0) 6(HD=1) 20(HD=2) 45(HD=3)		mA
		IOVDD = 3.0V	VPWR	2		mA

		Voutput = 2.7V			
		IOVDD = 3.0V	USBDP	8	mA
		Voutput = 2.7V	USBDM		
Internal Resistance Characteristics					
Symbol	Parameter	Conditions	IO	Typ	Unit
R _{pu}	Pull-up Resistance	IOVDD = 3.0V	PA0,PA1,PA3,PA4 PB3,PB7 PC2,PC3	10k	Ω
		IOVDD = 3.0V	PB1 VPWR	200k	Ω
		IOVDD = 3.0V	USBDP	1.5k	Ω
		IOVDD = 3.0V	USBDM	180k	Ω
R _{pd}	Pull-down Resistance	IOVDD = 3.0V	PA0,PA1,PA3,PA4 PB1,PB3,PB7 PC2,PC3 VPWR	10k	Ω
		IOVDD = 3.0V	USBDP USBDM	15k	Ω

Note1.Internal pull-up/pull-down resistance accuracy $\pm 20\%$ **3.6 Audio DAC Characteristics****Table 3-6 DAC Characteristics**

Parameter	Conditions	Min	Typ	Max	Unit
Resolution	--	--	16	--	bit
Sample Rate	--	8	--	96	kHz
SNR ^①	Differential Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted load=10kΩ	--	108	--	dB
	Single-ended Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted load=10kΩ	--	97	--	dB
Dynamic Range	Differential Mode Fin=1kHz@-60dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted	--	102	--	dB

Parameter	Conditions	Min	Typ	Max	Unit
	load=10kΩ				
	Single-ended Mode Fin=1kHz@-60dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted load=10kΩ	--	94	--	dB
THD+N	Differential Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted load=32Ω	--	-85	--	dB
	Single-ended Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted load=32Ω	--	-80	--	dB
Noise Floor	Differential Mode B/W=20Hz~20kHz A-Weighted load=10kΩ	--	13	--	uVrms
	Single-ended Mode B/W=20Hz~20kHz A-Weighted load=10kΩ	--	16	--	uVrms
Noise Floor with MUTE	Differential Mode B/W=20Hz~20kHz A-Weighted load=10kΩ	--	6	--	uVrms
	Single-ended Mode B/W=20Hz~20kHz A-Weighted load=10kΩ	--	12	--	uVrms
Stereo Crosstalk	Single-ended Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted load=10kΩ	--	-110	--	dB
Max Output Power	Differential Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted load=16Ω THD+N<0.1%	--	82	--	mW
	Single-ended Mode Fin=1kHz@0dBFS Fs=44.1kHz	--	33	--	mW

Parameter	Conditions	Min	Typ	Max	Unit
	B/W=20Hz~20kHz A-Weighted load=16Ω THD+N<0.1%				

Note

1. ① SNR is the ratio of output level with a 1kHz full-scale input to output level with MUTE on

3.7 Audio ADC Characteristics

Table 3-7 Audio ADC Characteristics

Parameter	Conditions	Min	Typ	Max	Unit
Resolution	--	--	16	--	bit
Sample Rate	--	8	--	48	kHz
SNR	Differential input Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted ADC gain=0dB	--	98	--	dB
	Single-ended input Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted ADC gain=0dB	--	94	--	dB
Dynamic Range	Differential input Mode Fin=1kHz@-60dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted ADC gain=0dB	--	98	--	dB
	Single-ended input Mode Fin=1kHz@-60dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted ADC gain=0dB	--	94	--	dB
THD+N	Differential input Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted ADC gain=0dB	--	-90	--	dB
	Single-ended input Mode Fin=1kHz@0dBFS Fs=44.1kHz B/W=20Hz~20kHz A-Weighted ADC gain=0dB	--	-80	--	dB

Parameter	Conditions	Min	Typ	Max	Unit
Analogue Gain	--	-6	--	21	dB
Max Input Level	Differential input Mode ADC gain=0dB	--	2	--	Vrms
	Single-ended input Mode ADC gain=0dB	--	1	--	Vrms

3.8 BT Characteristics

3.8.1 Transmitter

Table 3-8-1 Transmitter characteristics

Parameter	Conditions	Min	Typ	Max	Unit
Maximum RF Transmit Power	BR	--	8	10	dBm
Maximum RF Transmit Power	EDR $\pi/4$ DQPSK EDR 8DPSK	--	8	--	dBm
Relative Transmit Power	EDR $\pi/4$ DQPSK EDR 8DPSK	--	-3	--	dB
Maximum RF Transmit Power	BLE-1Mbps	--	8	--	dBm

3.8.2 Receiver

Table 3-8-2 Receiver characteristics

Parameter	Conditions	Min	Typ	Max	Unit
Sensitivity	BR	--	-89	--	dBm
	EDR $\pi/4$ DQPSK	--	-89	--	dBm
	EDR 8DPSK	--	-81	--	dBm
	BLE-1Mbps	--	-93	--	dBm
	BLE-2Mbps	--	-90	--	dBm

3.9 FM Characteristics

Table 3-9 FM Characteristics

Parameter	Conditions	Min	Typ	Max	Unit
Frequency range	--	64	--	108	MHz
RF Mono sensitivity	(S+N)/N=26dB	--	20	--	dBuV
Mono Audio SNDR	--	--	65	--	dB
Stereo Audio SNDR	--	--	55	--	dB
Stereo channel separation	--	--	40	--	dB

4 Package Information

4.1 SOP16

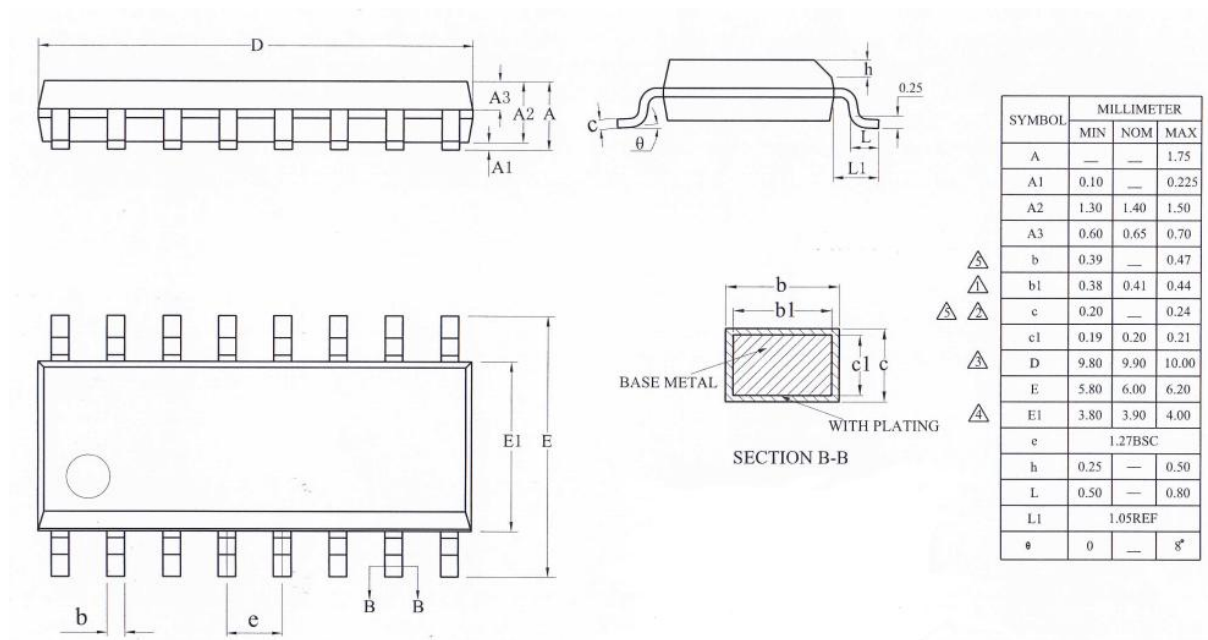


Figure 4-1 AC7069A Package

5 IC Marking Information

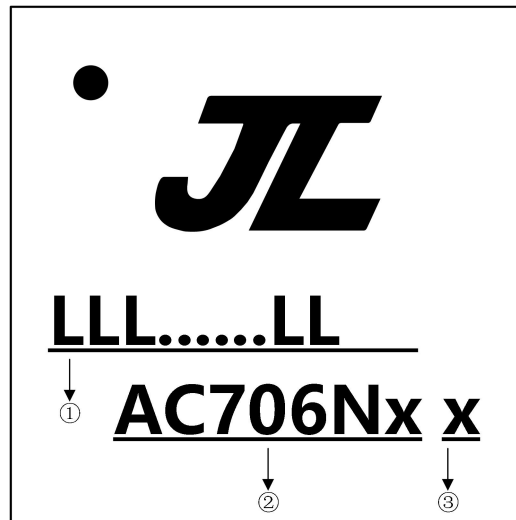


Figure 5-1 AC7069A Package Outline

- ① LLL.....LL LOT No. , It contains 7 to 18 alphanumerics
- ② AC706Nx Chip Model
- ③ x Built-in flash size
 - 0 No Flash Memory
 - 2 2Mbit Flash
 - 4 4Mbit Flash
 - 8 8Mbit Flash
 - 6 16Mbit Flash
 - 3 32Mbit Flash

6 Solder-Reflow Condition

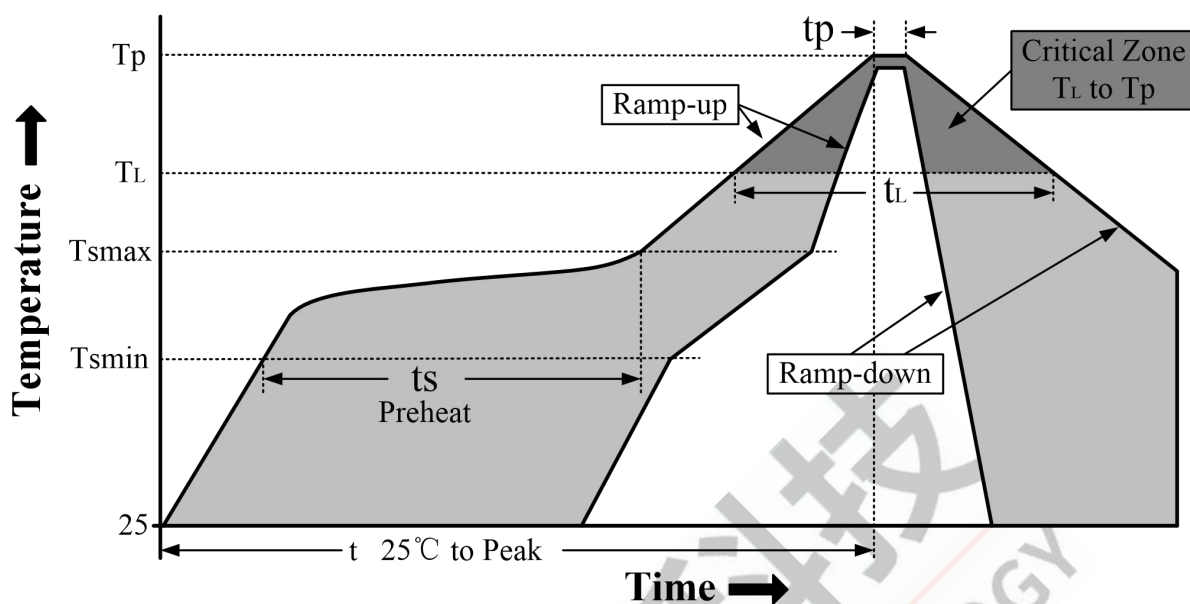


Figure 6-1 Classification Reflow Profile

Table 6-1 Classification Profiles

Profile Feature		Sn-Pb Eutectic Assembly	Pb-Free Assembly
Preheat/Soak	Temperature Min (T_{smin})	100°C	150°C
	Temperature Max (T_{smax})	150°C	200°C
	Time (ts) from (T_{smin} to T_{smax})	60-120 seconds	60-180 seconds
Average ramp-up rate (T_{smax} to T_p)		3°C/second max	3°C/second max
Liquidous temperature (T_L)		183°C	217°C
Time (t_L) maintained above T_L		60-150 seconds	60-150 seconds
Peak package body temperature (T_p)		See Table 6-2	See Table 6-3
Time within 5°C of actual Peak Temperature (tp) ²		10-30 seconds	20-40 seconds
Ramp-down rate (T_p to T_L)		6°C/second max	6°C/second max
Time 25°C to peak temperature		6 minutes max	8 minutes max

Note

1. All temperatures refer to topside of the package, measured on the package body surface
2. Time within 5°C of actual peak temperature (tp) specified for the reflow profiles is a "supplier" and "user" maximum.

Table 6-2 SnPb Classification Temperature

Package Thickness	Volume mm ³ < 350	Volume mm ³ ≥ 350
<2.5 mm	240 +0/-5°C	225 +0/-5°C
≥2.5 mm	225 +0/-5°C	225 +0/-5°C

Table 6-3 Pb-free - Classification Temperature

Package Thickness	Volume mm ³ < 350	Volume mm ³ 350 - 2000	Volume mm ³ > 2000
< 1.6mm	260°C	260°C	260°C
1.6 mm - 2.5mm	260°C	250°C	245°C
> 2.5mm	250°C	245°C	245°C

Note

1.*Tolerance The device manufacturer/supplier shall assure process compatibility up to and including the stated classification temperature (this means Peak reflow temperature +0°C.For example 260°C+0°C)at the rated MSL level.